




## Parallel Coaxial Lights




### Product Features

- High density SMD LED and high brightness
- Special heat conducting materials for good heat dissipation and high stability
- Compact structure design without cooling fan
- Suitable for highly reflective surface flatness inspection

### Model Guide

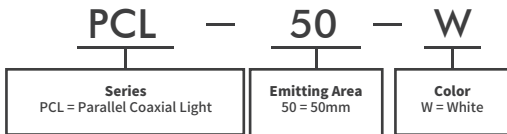

### Dimensional Drawing (mm)

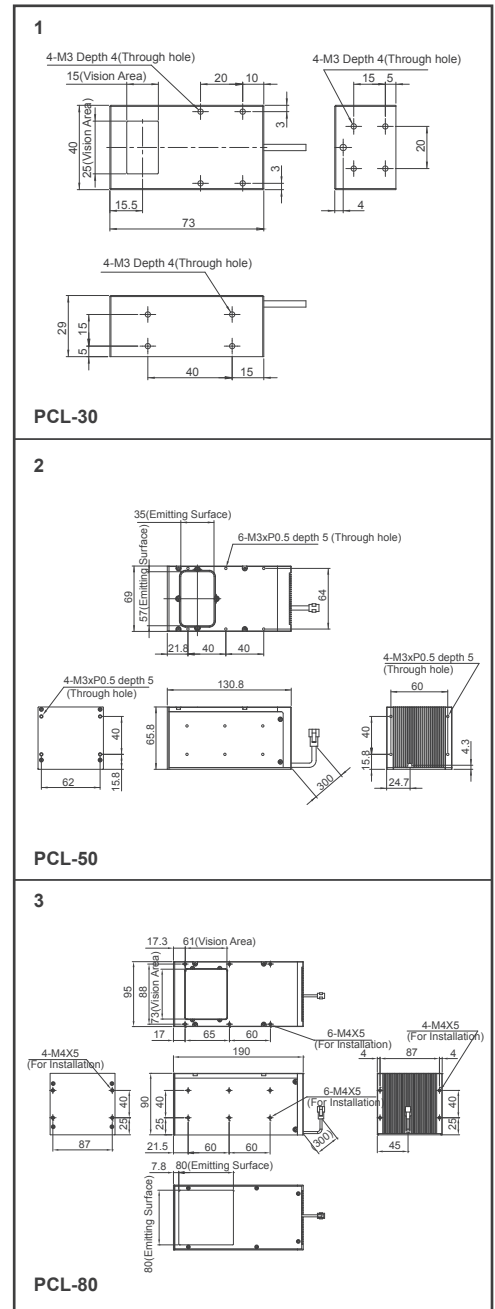

### Specification Table

Model	Color	Current / Power		Dimensions (mm)			Diagrams
		●	●●○	Length	Width	Height	
PCL-30	●●●○	0.7A / 3W	0.7A / 3W	73	40	29	1
PCL-50	●●●○	1A / 5W	1.5A / 5W	130.8	69	65.8	2
PCL-80	●●●○	1.5A / 5W	1A / 5W	190	95	90	3
APCL-50	●●●○	1.5A / 5W	1.5A / 5W	130.8	69	65.8	-

※ Only operated by constant current LED driver, and please pay attention to rated current

### Case Pictures

