


PJTRS/PJTA/PJTD Series

結構光源

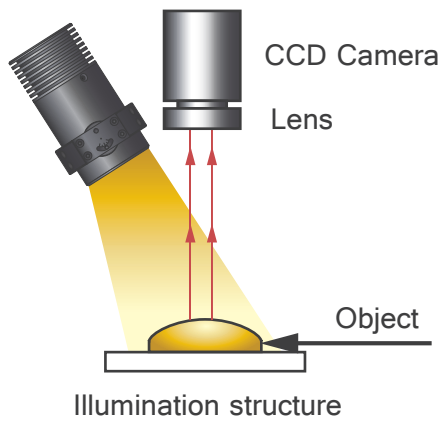

◆ 產品特色

- 可選具有Scheimpflug傾斜調整機構/全系列均與C-mount 鏡頭相容
- 可根據應用需求客製光型圖案
- 高亮度LED提供3W/5W/20W甚至到150W的閃頻 (選配)

◆ 產品型號

| | | | | | |
|--|---|---------------------|--------------------|---|---|
| PJTRS | — | 150 | W | — | R01 |
| Series PJTRS = Structured Light Projector with Precision Mask Rotary Stage | | Power 150 = 150W | Color W = White | | Mask Format R01 = Random Size : Ø50µm Density : 19.80 % |


◆ 系列規格表

| Model | Color | Current / Power | Interface Diameter | Diagrams |
|------------------|---------|--|--------------------|----------|
| PJTD-5 | ● ● ● ○ | 1.5A / 5W | C mount | 1 |
| PJTA-5 | ● ● ● ○ | 1.5A / 5W | C mount | 2 |
| PJTRS-20 | ● ● ● ○ | Continuous : 4A/20W Strobe : 10A/50W | C mount | 3 |
| PJTRS-150(pulse) | ● ● ● ○ | Continuous : 8A/40W Strobe : 30A/150W | C mount | 4 |

※ 僅限搭配定電流驅動器，並請注意額定電流


◆ 產品尺寸圖

(mm)

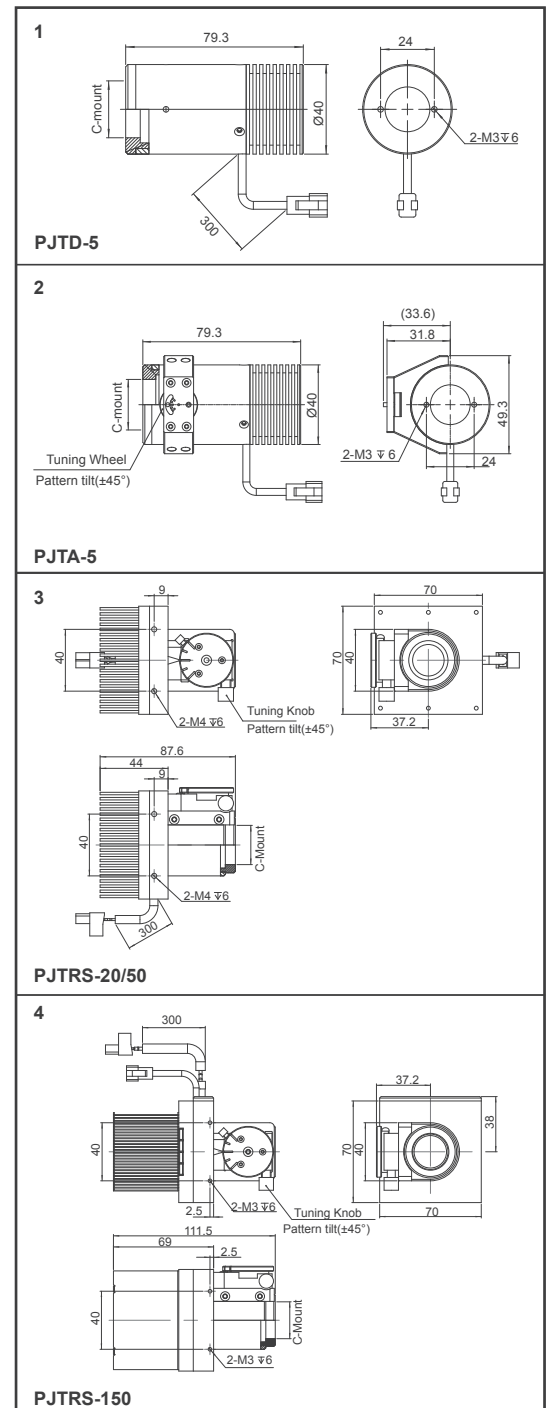

▲ 鏡頭不包括圖片當中

◆ 照明範例

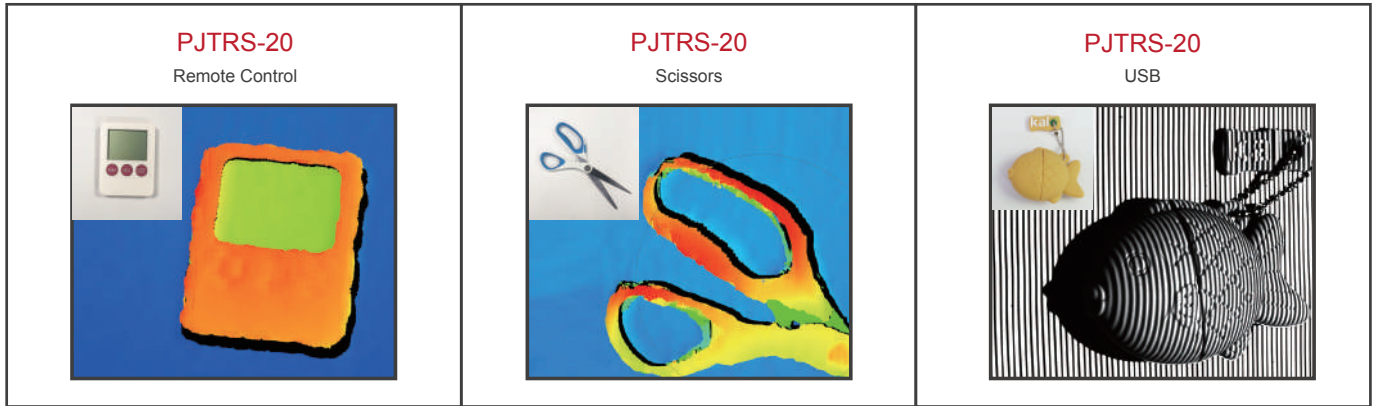

◆ 光罩規格


直線和條紋





十字



網格




同心圓



邊緣



點陣列



隨機點

