


Compact High Power Light Source Unit

DLSU2S / LSU2S Series



- **Compact Design with Uncompromised Brightness**
Delivers brightness equivalent to 160W/250W LED light boxes.
- **Miniaturized (<2L) and Lightweight (<2Kg)**
Optimized for inspection environments with limited space.
- **Versatile Communication Interfaces**
Built-in USB interface; optional RS232 and Ethernet interfaces available.
- **Optional Feedback Module**
Enables real-time brightness monitoring and automatic compensation.
- **Optional Accessories**
Supports various light guide adapter, large-aperture brightness enhancement modules and din-rail mounted fixtures.

Product Model

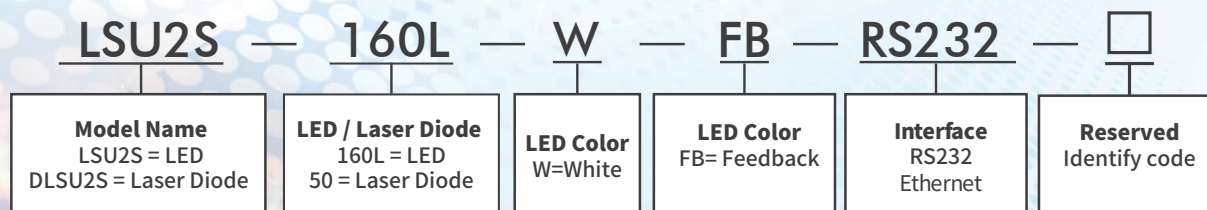

Product Specifications


Series	Model	Laser ★ 1	LED ★ 2	Feedback	Interface	Color	Input Voltage
DLSU2S / LSU2S	DLSU2S-50-W	V			USB	White	DC24V
	LSU2S-160L-W		V		USB		
	LSU2S-160L-W-FB		V	V	USB		
	LSU2S-160L-W-ETH		V		USB + Ethernet		
	LSU2S-160L-W-RS232		V		USB + RS232		
	LSU2S-160L-W-FB-ETH		V	V	USB + Ethernet		
	LSU2S-160L-W-FB-RS232		V	V	USB + RS232		

★ 1 : 250W LED eq. brightness



★ 2 : 160W LED eq. brightness



Product Illumination

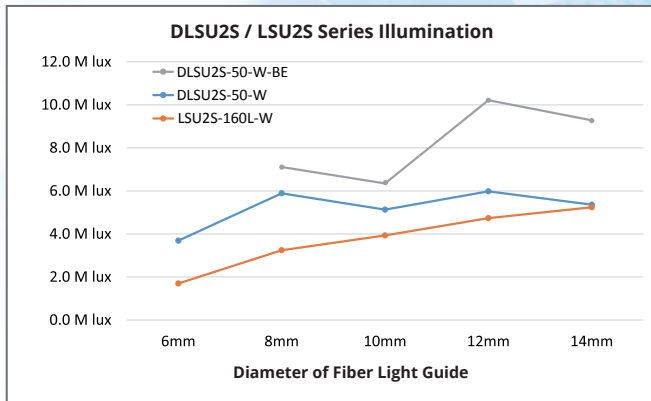

Product Spectrum

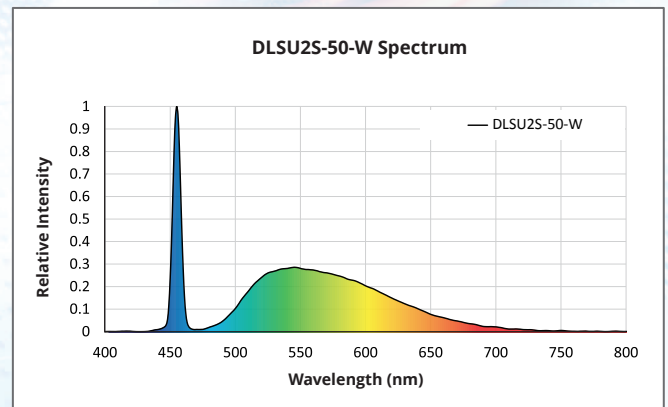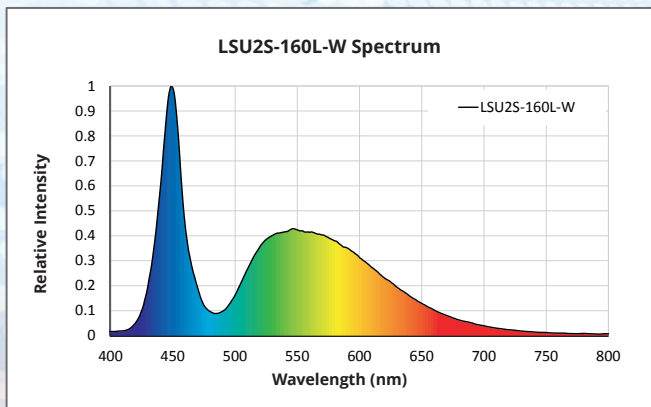

Dimensional Drawing

