

小型化高亮度燈箱

DLSU2S / LSU2S Series



- 體積縮小亮度不打折 - 等校160W/250W LED燈箱亮度
- 小型化 (<2L)、輕量化(<2Kg) - 更適用於空間受限檢測環境
- 多元化通訊界面 - USB通訊介面,可選配RS232 & Ethernet介面
- 可選配 Feedback模組 - 即時亮度監控補償
- 選購配件 - 各式光纖接口、大口徑增亮模塊與軌道安裝治具

產品型號

LSU2S	—	160L	—	W	—	FB	—	RS232	—	☐
Model Name LSU2S = LED DLSU2S = Laser Diode		LED / Laser Diode 160L = LED 50 = Laser Diode		LED Color W=White		LED Color FB= Feedback		Interface RS232 Ethernet		Reserved Identify code

產品規格


Series	Model	Laser ★ 1	LED ★ 2	Feedback	Interface	Color	Input Voltage
DLSU2S / LSU2S	DLSU2S-50-W	V			USB	White	DC24V
	LSU2S-160L-W		V		USB		
	LSU2S-160L-W-FB		V	V	USB		
	LSU2S-160L-W-ETH		V		USB + Ethernet		
	LSU2S-160L-W-RS232		V		USB + RS232		
	LSU2S-160L-W-FB-ETH		V	V	USB + Ethernet		
	LSU2S-160L-W-FB-RS232		V	V	USB + RS232		

★ 1: 250W LED eq. brightness



★ 2: 160W LED eq. brightnes



產品照度

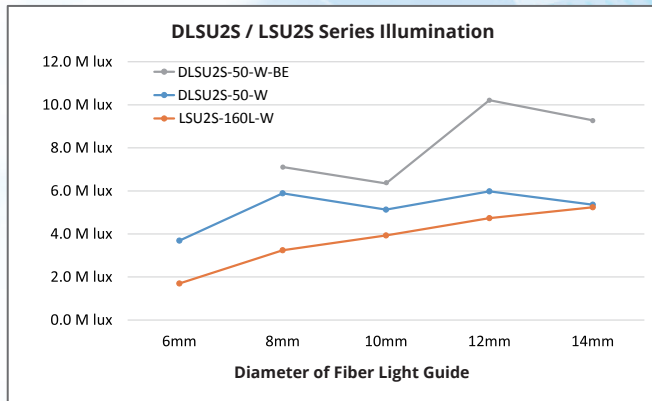

產品光譜圖

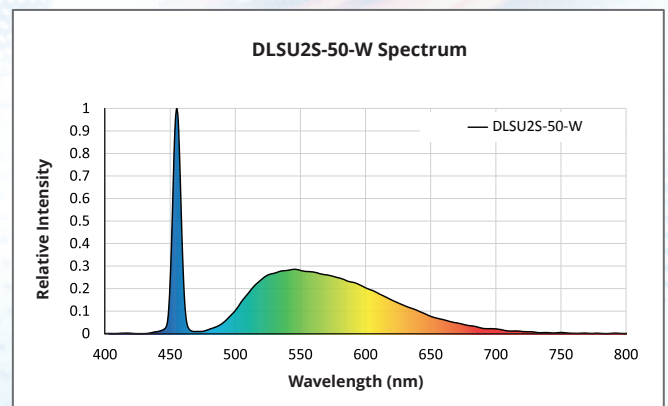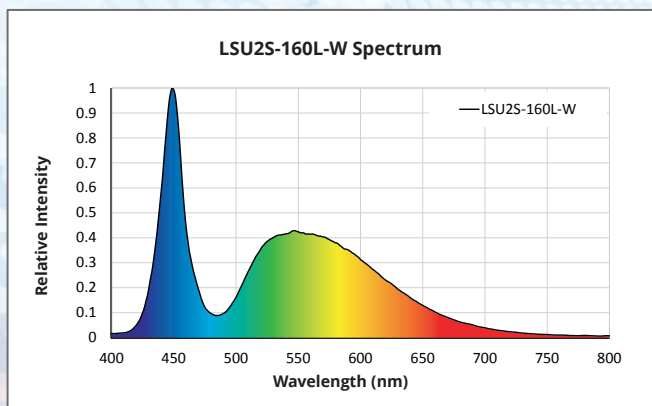

產品尺寸圖

