

LIGHT SOURCE UNIT SOLUTION

LSU-80 / 100 / 150 / 160FR Series

Ultra-high Brightness up to 4M Lux.
Superior Strobe Control frequency reaches to 100KHz.



5F., NO.1, LN. 63, GUANXIN RD., EAST DIST., HSINCHU CITY 30072, TAIWAN (R.O.C.)

TEL : +886-3-6686923 FAX : +886-3-6686423







SALES@BESTINTECH.COM.TW



LSU-160FR Series



- Max. brightness up to 4M Lux. (@14mm fiber)
- High-speed photo-coupler receiver allows the strobe output frequency reaches to 30KHz.
- 5 color filter slots for customer choice

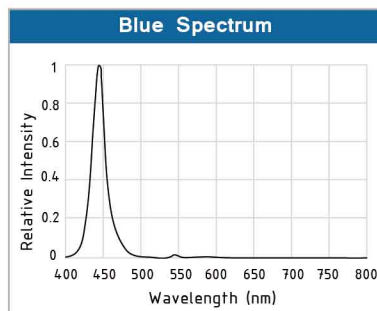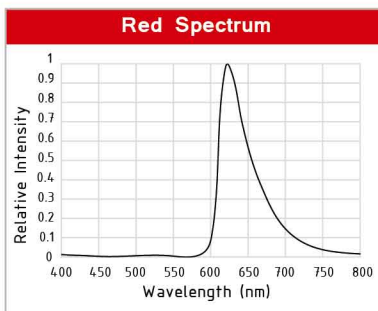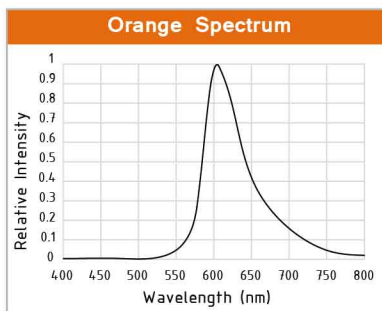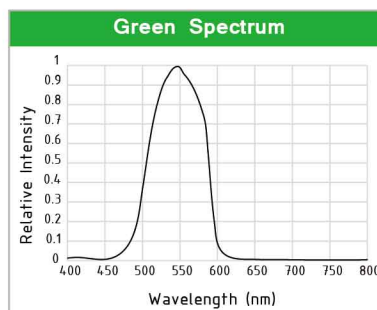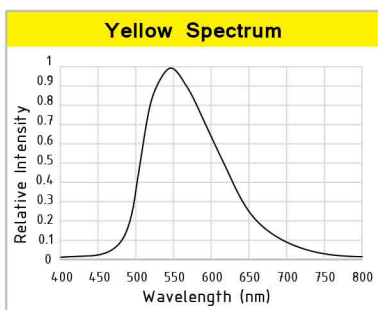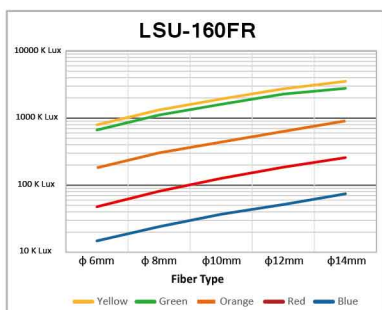

LSU-80/100/150 Series



▲ LSU-80

- LSU-80 offers RGBW color mixing function for even denser levels of brightness and color effect
- LSU-100 / 150 offers a variety of single color to choose from, including white, red, blue, green, IR and UV



▲ LSU-100/150

