


LLSW/LLS-PAR Series

Fanless High Brightness Linear Lights

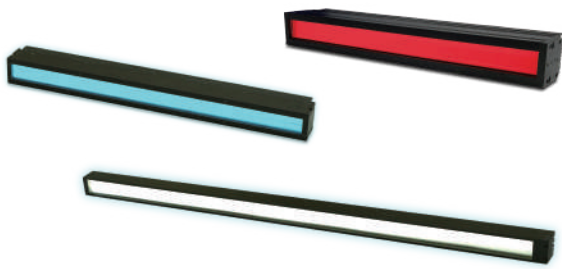

Product Features

- Suitable for high speed / high definition Line Scan imaging
- Higher brightness : LLS-PAR series > 500K Lux ; LLSW series > 1M Lux
- Best light efficiency, no need for cooling fan for more convenient installation
- Provide over drive strobe to reach 2X brightness
- Customized length available, the longest up to 3.2 meters



Model Guide

LLSW	—	200	—	W	—	27W	—	T
Series		Emitting Length		Color		Power Consumption		Illumination Type
Fanless High Brightness Linear Light								R = Reflection type T = Transmission type

LLS	—	600	—	W	—	60W	—	PAR	—	R
Series		Emitting Length		Color		Power Consumption		Parallel		Illumination Type
Strobe High Brightness Linear Light										R = Reflection type T = Transmission type

Dimensional Drawing

(mm)

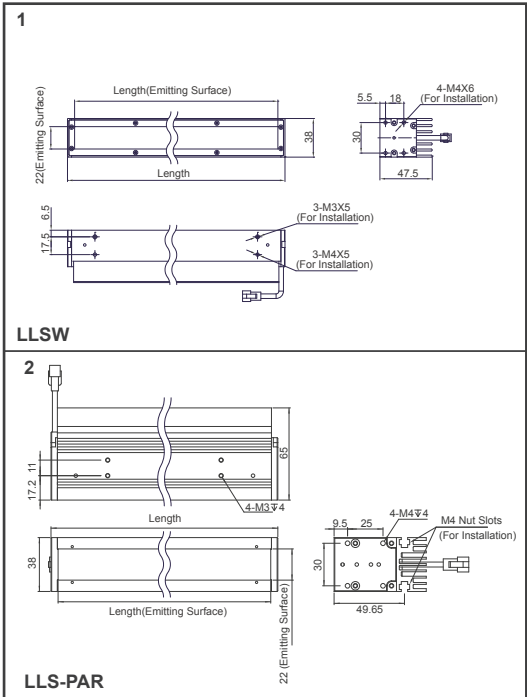

Specification Table

Model	Color	Current / Power	No. of Channel	Dimensions (mm)			Diagrams
				Length	Width	Height	
LLSW-100	● ● ● ○	0.5A / 16W	1	114	51.5	38	1
LLSW-150	● ● ● ○	0.5A / 20W	1	164	51.5	38	1
LLSW-200	● ● ● ○	0.5A / 27W	2	214	51.5	38	1
LLSW-300	● ● ● ○	0.5A / 33W	2	314	51.5	38	1
LLSW-400	● ● ● ○	0.75A / 45W	2	414	51.5	38	1
LLSW-500	● ● ● ○	0.75A / 54W	2	514	51.5	38	1
LLSW-600	● ● ● ○	0.75A / 60W	2	614	51.5	38	1
LLSW-1200	● ● ● ○	0.75A / 120W	4	1214	51.5	38	1
Model	Color	Current / Power	No. of Channel	Dimensions (mm)			Diagrams
				Length	Width	Height	
LLS-100-PAR	● ● ● ○	0.5A / 16W	1	114	65	38	2
LLS-150-PAR	● ● ● ○	0.5A / 20W	1	160	65	38	2
LLS-200-PAR	● ● ● ○	0.5A / 27W	2	214	65	38	2
LLS-300-PAR	● ● ● ○	0.5A / 33W	2	314	65	38	2
LLS-400-PAR	● ● ● ○	0.75A / 45W	2	414	65	38	2
LLS-500-PAR	● ● ● ○	0.75A / 54W	2	514	65	38	2
LLS-600-PAR	● ● ● ○	0.75A / 60W	2	614	65	38	2
LLS-1200-PAR	● ● ● ○	0.75A / 120W	4	1214	65	38	2

※ Only operated by constant current LED driver, and please pay attention to rated current