

SCLD LIGHT Series


Single-Channel Lightweight Constant Current LED Driver



◆ Product Features

- Input Voltage : DC24V
- Recommend working voltage output : DC13V~22.5V
- Output Current : 2000mA max.
- Automatically stop current output when output short circuit in order to avoid abnormal operating
- External pulse switch control : provides external trigger switch signal to synchronize LED strobe; the maximum frequency of strobe input reaches to 100Hz

◆ Model Guide

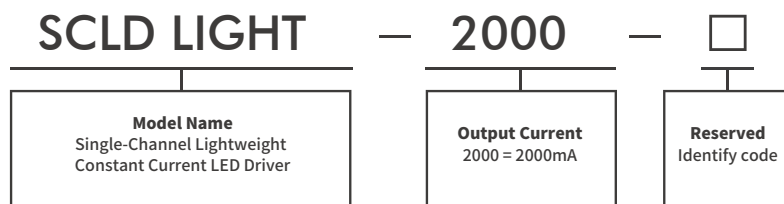

◆ Specification Table

Model	Input Voltage	Output Voltage	Output Current
SCLD LIGHT	DC24V	DC13V~22.5V	2000mA

※ Customized output voltage/current available

◆ Dimensional Drawing

