


CL/CL2/CL3/CLSP/HICL2 Series

同軸光源/高亮度同軸光源



◆ 產品特色

- 高密度SMD LED自動化焊接，達到高亮度照明
- 特殊熱傳導材料和精巧結構設計，不需要風扇散熱
- 堅實組裝工法與靈活的安裝選擇
- 採用特殊高階鍍膜分光鏡，提供高品質的光學效果
- 適合檢查高反射表面的刮傷與瑕疵
- CLSP系列提供體積更小的設計，節省安裝空間

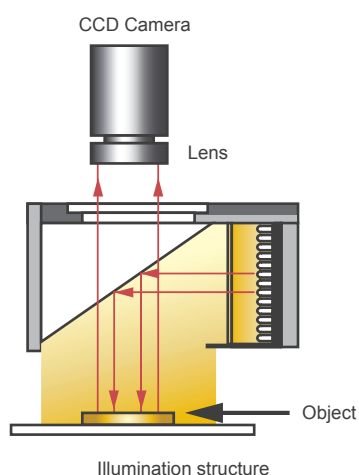


◆ 系列規格表

Model	Voltage	Color	Power (W)		No. of Channel	Dimensions (mm)			Diagrams
			   			Length	Width	Height	
CL-20	24V	   	1.7	1.5	1	46	30	26	1
CL-30	24V	   	2.5	2.5	1	56	38	36	2
CL2-40	24V	   	4.3	6	1	86	50	47	3
CL2-50	24V	   	7	9	1	75	60	56.2	4
CL2-60	24V	   	10	10	1	106	70	67	5
CL2-70	24V	   	11	11	1	120	85.4	79	6
CL2-90	24V	   	24	18	1	130	98	87	7
CL2-100	24V	   	18	22	1	146	110	107	8
CL2-120	24V	   	24	30	1	168	135	132	9
CL2-130X80	24V	   	40	50	1	147	130	87	10
CL2-150	24V	   	48	60	1	198	165	162	11
CL2-180X80	24V	   	28	35	1	190	126	87	12
CLSP-40	24V	   	2	2.5	1	52	50	47	13
CL3-40	24V	   	4.3	6	1	86	50	47	3
CL3-50	24V	   	10	10	1	95	60	55	4
CL3-60	24V	   	12	12	1	106	70	67	5
CL3-70	24V	   	15	15	1	120	85.4	79	6
CL3-100	24V	   	24	24	1	146	110	107	8
Model		Color	Current / Power		No. of Channel	Dimensions (mm)			Diagrams
						Length	Width	Height	
HICL2-50		   	1.5A / 18W		1	190.8	70	70	14
HICL2-250X100		   	2A / 90W		1	264	173	116	15
HICL2-300		   	1.25A / 200W		4	370	314	316	16

※ H1CL2僅限搭配定電流驅動器，並請注意額定電流


◆ 產品型號

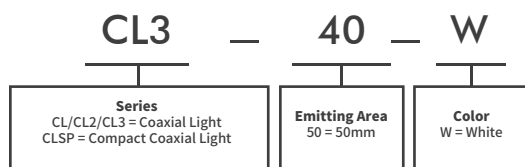

◆ 照明範例



◆產品尺寸圖

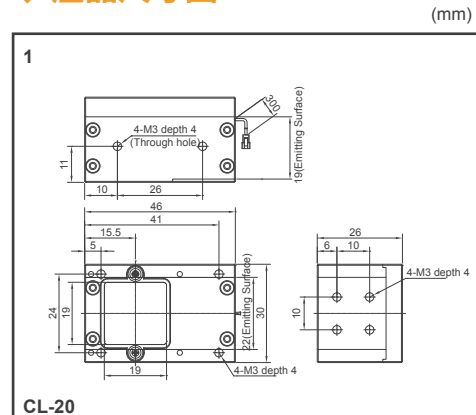

◆ 產品尺寸圖

(mm)

2 CL-30	3 CL2-40 / CL3-40	4 CL2-50/CL3-50
5 CL2-60 / CL3-60	6 CL2-70 / CL3-70	7 CL2-90
8 CL2-100/CL3-100	9 CL2-120	10 CL2-130X80
11 CL2-150	12 CL2-180X80	13 CLSP-40
14 HICL2-50	15 HICL2-250X100	16 HICL2-300