


HICIR/HILCIR Series

高亮度環型光源

◆ 產品特色

- 超高亮度指向性直接照明，可有效凸顯表面瑕疵
- 專利模組化設計，提供穩定且均勻的照明效果
- 高功率LED與高效率光學設計，超越傳統環型燈20~100倍以上亮度
- 專利產品

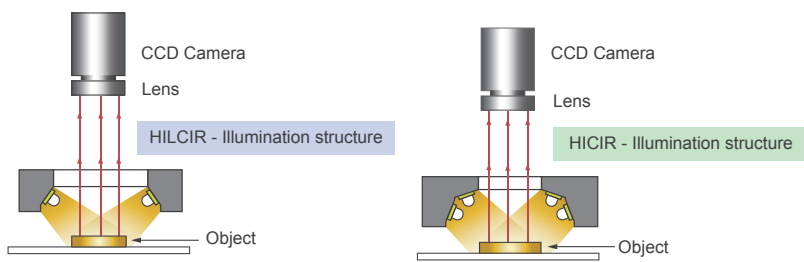

◆ 產品型號

HICIR	—	114	39	—	70	—	35	—	W
Series		O.D.	I.D.		Angle		Angle		Color
HICIR = High Power Ring Light		114 = 114mm	39 = 39mm		70 = 70°		35 = 35°		W = White

◆ 系列規格表

Model	Color	Current / Power	No. of Channel	Dimensions (mm)			Diagrams
				O.D.	I.D.	Angle	
HILCIR-12073-35	● ● ● ○	Continuous: 1A/20W Strobe: 4A/80W	1	120	73	35	1
HILCIR-13277-35	● ● ● ○	Continuous: 0.75A/13W Strobe: 2A/35W	1	132	77	35	2
HICIR-11439-70-35	● ● ● ○	Continuous: 0.35A/22W Strobe: 2A/120W	3	114	39	70/35	3
HICIR-16770-70-35	● ● ● ○	Continuous: 0.35A/36W Strobe: 2A/200W	5	167	70	70/35	4
HILCIR2-8139-35	● ● ● ○	Continuous: 0.35A/36W Strobe: 2A/200W	2	81	39	35	-
HILCIR2-11060-35	● ● ● ○	Continuous: 0.35A/36W Strobe: 2A/200W	2	110	60	35	-
HICIR2-9535-60	● ● ● ○	Continuous: 0.35A/36W Strobe: 2A/200W	1	95	35	60	-

註：僅限搭配定電流驅動器，並請注意額定電流。

Power (W) for Different Drive Mode				
Model	Color	In continuous drive mode	In strobe drive mode	Strobe drive conditions (Ts = Surface temperature)
HILCIR-12073-35-W	○	20W	80W	tp ≤ 100mS; D ≤ 0.25; Ts = 25°C
HILCIR-13277-35-W	○	13W	35W	tp ≤ 100mS; D ≤ 0.37; Ts = 25°C
HICIR-11439-70-W	○	13.6W	280W	tp ≤ 100mS; D ≤ 0.04; Ts = 25°C
HICIR-16770-70-W	○	20W	336W	tp ≤ 100mS; D ≤ 0.05; Ts = 25°C
HILCIR2-8139-35	○	22W	120W	tp ≤ 100mS; D ≤ 0.18; Ts = 25°C
HILCIR2-11060-35	○	36W	200W	tp ≤ 100mS; D ≤ 0.18; Ts = 25°C
HICIR2-9535-60	○	10W	122W	tp ≤ 100mS; D ≤ 0.08; Ts = 25°C

◆ 產品尺寸圖

(mm)

