


Diffused Ring Light/High Power Diffused Ring Lights




Product Features

- Evenly distributed LEDs go through the light panels to form a diffused light
- Good uniformity and high brightness
- Suitable for illumination on the surface that requires high uniformity and able to avoid reflective light interference
- Over 1M Lux.



Model Guide

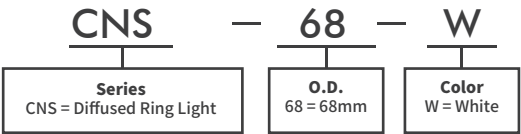

Specification Table

Model	Voltage	Color	Power (W)		Dimensions (mm)			Diagrams
					O.D.	I.D.	Height	
CNS-48	24V		2	3	48	10	14	1
CNS-68	24V		4	6.4	68	22.5	14	2
CNS-100	24V		5.6	9	100	35	18	3
CNS-125	24V		8	12.5	125	35	26	4
CNS-150	24V		9.5	14	150	60	24	5

Model	Color	Current / Power	Dimensions (mm)			Diagrams
			O.D.	I.D.	Height	
HICNS2-68		Continuous: 0.35A/6.7W Strobe: 4A/89.5W	68	22.5	20.5	6
HICNS2-100		Continuous: 0.6A/12W Strobe: 6A/135W	100	35	21	7
HICNS2-125		Continuous: 0.9A/17.5W Strobe: 8A/182W	125	35	25	8

Remarks : Only operated by constant current LED driver, and please pay attention to rated current

Case Pictures

CNS-68-W

Metal drill inspection

CNS-100-W

Bright and dark field screw head inspection

dark field

bright field

Dimensional Drawing

